

# FLIR A325sc

Thermal imaging camera for real-time analysis



## EXCELLENT IMAGE QUALITY AND THERMAL SENSITIVITY

FLIR A325sc is equipped with an uncooled Vanadium Oxide (VoX) microbolometer detector that produces thermal images of 320 x 240 Pixels. These pixels generate crisp and clear detailed images that are easy to interpret with high accuracy. The FLIR A325sc will make temperature differences as small as 50 mK clearly visible.

## FAST DATA TRANSFER

FLIR A325sc comes with a RJ-45 Gigabit Ethernet connection which supplies 14-bit 320 x 240 images at rates as high as 60 Hz.

## GIGE VISION™ STANDARD COMPATIBILITY

GigE Vision allows fast image transfer using low cost standard cables up to 100 meters. With GigE Vision, hardware and software from different vendors can integrate seamlessly over gigabit ethernet connections.

## GENICAM™ PROTOCOL SUPPORT

GenICam creates a common application programming interface (API) for cameras regardless of the interface technology or features implemented. Because the API for GenICam cameras will always be the same, cameras like the A325sc can be easily integrated into third party software.

## SOFTWARE


FLIR A325sc camera works seamlessly with FLIR ResearchIR Max software enabling intuitive viewing, recording and advanced processing of the thermal data provided by the camera. A Software Developers Kit (SDK) is optionally available.

## MATHWORKS® MATLAB


Control and capture data directly into MathWorks® Matlab software for advanced image analysis and processing.

## KEY FEATURES

- Uncooled microbolometer: 320 x 240 pixels
- Gigabit ethernet interface
- Close-up and telephoto lenses available
- ResearchIR max software included
- Matlab compatible

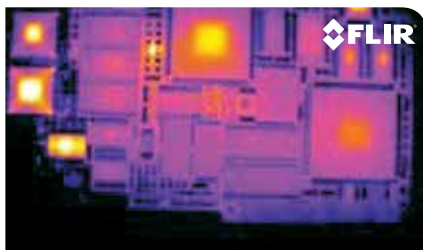

Verification of PCB

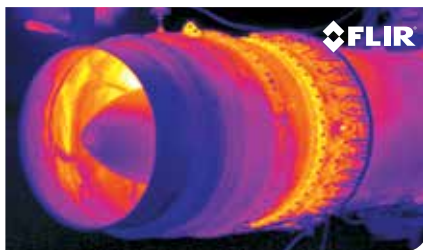


Jet engine



## Imaging Specifications

Detector	FLIR A325sc
Detector Type	Uncooled Microbolometer
Spectral Range	7.5 – 13.0 $\mu\text{m}$
Resolution	320 $\times$ 240
Detector Pitch	25 $\mu\text{m}$
NETD	<50 mK
Electronics / Imaging	
Time Constant	<12 ms
Frame Rate	60 Hz
Dynamic Range	14-bit
Digital Data Streaming	Gigabit Ethernet (60 Hz)
Command & Control	Gigabit Ethernet
Measurement	
Standard Temperature Range	-20°C to 120°C (-4°F to 248°F) 0°C to 350°C (32°F to 662°F)
Optional Temperature Range	Up to 2,000°C (3,632°F)
Accuracy	$\pm 2^\circ\text{C}$ or $\pm 2\%$ of Reading
Optics	
Camera f/#	f/1.3
Integrated Lens	18 mm (25°)
Available Lenses	76 mm (6°), 30 mm (15°), 10 mm (45°), 4 mm (90°)
Close-up Lenses / Microscopes	Close-up 25 $\mu\text{m}$ , 50 $\mu\text{m}$ , 100 $\mu\text{m}$
Focus	Automatic or Manual (Motorized)
Image Presentation	
Digital Data Via PC	Using ResearchIR Software
General	
Operating Temperature Range	-15°C to 50°C (5°F to 122°F)
Storage Temperature Range	-40°C to 70°C (-40°F to 158°F)
Encapsulation	IP 40 (IEC 60529)
Bump / Vibration	25 g (IEC 60068-2-29) / 2 g (IEC 60068-2-6)
Power	12/24 VDC, 24 W Absolute Max.
Weight w/Lens	0.7 kg (1.54 lb)
Size (L $\times$ W $\times$ H) w/Lens	170 $\times$ 70 $\times$ 70 mm (6.7 $\times$ 2.8 $\times$ 2.8 in)
Mounting	1/4"-20 (on three sides), 2 $\times$ M4 (on three sides)

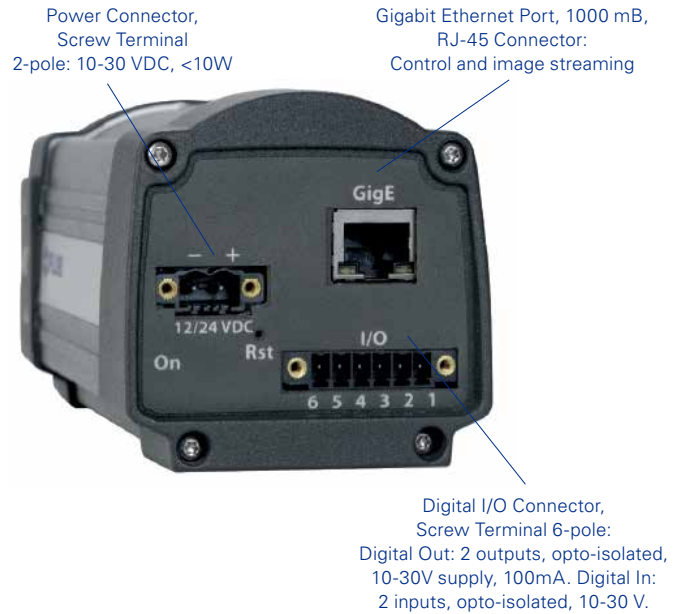

**PORTLAND**  
Corporate Headquarters  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

**BELGIUM**  
FLIR Systems Trading  
Belgium BVBA  
Luxemburgstraat 2  
2321 Meer  
Belgium  
PH: +32 (0) 3665 5100

**SWEDEN**  
FLIR Systems AB  
Antennvägen 6,  
PO Box 7376  
SE-187 66 Täby  
Sweden  
PH: +46 (0)8 753 25 00

www.flir.com  
NASDAQ: FLIR

Specifications are subject to change without notice  
©Copyright 2014, FLIR Systems, Inc. All other brand and product names are trademarks of their respective owners. The images displayed may not be representative of the actual resolution of the camera shown. Images for illustrative purposes only. (Created 08/14)

**NASHUA**  
FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 06063  
USA  
PH: +1 603.324.7611

**UK**  
FLIR Systems UK  
2 Kings Hill Avenue  
Kings Hill  
West Malling - Kent  
ME19 4AQ  
United Kingdom  
PH: +44 (0)1732 220 011